

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number  
**WO 02/16207 A1**

(51) International Patent Classification<sup>7</sup>: **B65B 47/02**

(21) International Application Number: PCT/GB01/03826

(22) International Filing Date: 23 August 2001 (23.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
0020964.3 25 August 2000 (25.08.2000) GB

(71) Applicant (*for all designated States except US*):  
**RECKITT BENCKISER (UK) LIMITED** [GB/GB];  
103-105 Bath Road, Slough, Berkshire SL1 3UH (GB).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report


*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HAMMOND, Geoffrey, Robert** [GB/GB]; 574 James Reckitt Avenue, Hull HU8 0LG (GB). **ROGERS, Richard** [GB/GB]; Meadows View, Harling Road, Great Hockham, Thetford, Norfolk IP24 1NT (GB).

(74) Agents: **DICKSON, Elizabeth, Anne et al.**; Reckitt Benckiser plc, Group Patents Department, Dansom Lane, Hull HU8 7DS (GB).

(54) Title: PROCESS AND MOULD FOR THERMOFORMING CONTAINERS

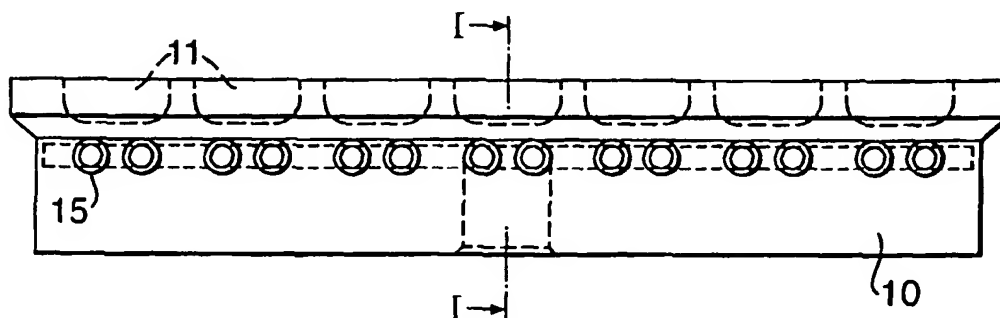

(57) Abstract: The present invention relates to a method of manufacturing water-soluble containers using a horizontal intermittent motion thermoforming machine which comprises the steps of: a) locating a first water-soluble film over a mould, said mould containing a plurality of pocket forming cavities, defined by side walls and a base, in a 2-dimensional array, each cavity being surrounded by a planar surface of the mould on all sides in which the shortest dimension of the planar surface between two adjacent cavities is at least 3 mm and between an edge of the mould and the closest cavity is at least 1.5 mm; b) thermoforming the first film to produce a plurality of pockets; c) at least partially filling the pockets with a composition; and d) sealing the plurality of the at least partially filled pockets. The cavities are positioned in the array such that there are a plurality of continuous strips of uninterrupted planar surface of the mould from a leading to a trailing edge of the mould, for receiving support means fitted to the machine for supporting the film.

- 1 -

## PROCESS AND MOULD FOR THERMOFORMING CONTAINERS

5 The present invention relates to a method of manufacturing water-soluble containers and a mould for use therein.

10 It is known to package chemical compositions which may be of a hazardous or irritant nature in water soluble or water dispersible materials such as films. The package can simply be added to water in order to dissolve or disperse the contents of the package into the water.

15 For example, WO 89/12587 discloses a package which comprises an envelope of a water soluble or water dispersible material which comprises a flexible wall and a water-soluble or water-dispersible heat seal. The package may contain an organic liquid comprising, for example, a pesticide, fungicide, insecticide or  
20 herbicide.

It is also known to package detergents in water-soluble or water-dispersible containers. For example, WO 94/14941 discloses a water-soluble or water-dispersible  
25 capsule containing an aqueous dishwasher detergent. The capsule is made of gelatin.

CA-A-1,112,534 discloses a packet made of a water-soluble material in film form enclosing within it a  
30 paste-form, automatic dishwasher-compatible detergent composition. The water-soluble material may be, for example, polyvinyl alcohol, polyethylene oxide or methyl cellulose. Example 1 illustrates an embodiment wherein a poly(vinyl alcohol) (PVOH) film is made into a 5cm square  
35 packet by heat sealing its edges, and the packet is filled with a composition which contains 8.5 wt.% water.

- 2 -

In fields such as detergents for domestic use, an attractive appearance for an article is extremely desirable. However in the prior art, such as that described above, a bag is simply formed from a single sheet of water-soluble film. The film is folded and the edges heat-sealed to form the bag. The bag is then filled and heat-sealed. This produces a rather flat, limp envelope containing the product. Furthermore there may be a lack of uniformity between different bags because of their flexible nature.

We have discovered that this type of product is not deemed to be attractive by an average consumer.

It is known to form water-soluble containers by thermoforming a water-soluble material. For example, WO 92/17382 discloses a package containing an agrochemical such as a pesticide comprising a first sheet of non-planar water-soluble or water-dispersible material and a second sheet of water-soluble or water-dispersible material superposed on the first sheet and sealed to it by a continuous closed water-soluble or water-dispersible seal along a continuous region of the superposed sheets. It is stated to be advantageous to ensure that the package produced is evacuated of air or the contents are under reduced pressure to provide increased resistance to shock. Furthermore, when the package contains a liquid, the liquid must be an organic liquid which must be reasonably dry and typically contains less than 2 to 3% of water to ensure that it does not attack the water-soluble package and cause leakage.

EP-A-654,418 describes self-standing flexible pouches which may contain, for example, liquid detergent compositions for refilling other containers. In order to avoid folding of the pouch, which can lead to cracking and leakage, the bag is inflated before it is sealed.

- 3 -

In order to improve the strength of packages containing liquids, it is also known to provide the package with residual inflatability. Thus, for example, EP-A-524,721 describes a water-soluble package which contains a liquid, wherein the package is inflatable to a volume which is greater than the initial volume of the package. Thus the package is filled to less than its complete capacity, and the unused capacity may be partially, but not totally, filled with a gas such as air. The unused capacity which does not contain gas provides the residual inflatability.

We have now surprisingly discovered a water-soluble container which contains a liquid composition can be given an attractive three-dimensional appearance by using a thermoforming technique, such as that disclosed in WO 92/17382, on a PVOH film and ensuring that the liquid composition has a reasonably large water content of at least 3 wt% free water, based on the weight of the aqueous composition. Immediately after the containers are prepared, they have a limp, unattractive appearance. However, after storage for a short while, for example, from a few minutes to a few hours, they develop a more attractive three-dimensional appearance, and also appear to look fuller. They can also be said to have a "puffed-up" appearance. Although not bound by this theory, it is believed that the water in the aqueous composition shrinks the PVOH film around the liquid composition to provide the attractive appearance. In other words the PVOH film attempts to recover its original shape when contacted with the aqueous composition.

In our co-pending application entitled "Improvements in or Relating to Aqueous Compositions" we describe a process for producing a container as defined above which comprises the steps of:

a) thermoforming a first PVOH film to produce a

- 4 -

- b) filling the pocket with the aqueous composition;
- c) placing a second PVOH film on top of the filled pocket; and
- d) sealing the first film and second film together.

5

The method of forming the container is similar to the process described in WO 92/17382. A first PVOH film is initially thermoformed into a mould to produce a non-planar sheet containing a pocket, such as a recess, which is able to retain the aqueous composition. The pocket is generally bounded by a flange, which is preferably substantially planar. The pocket may have internal barrier layers as described in, for example, WO 93/08095. The pocket is then filled with the aqueous composition, and a second PVOH film is placed on the flange and across the pocket. The second PVOH film may or may not be thermoformed. The pocket may be completely filled, or only partly filled, for example to leave an air space of from 2 to 20%, especially from 5 to 10%, of the volume of the container immediately after it is formed. Partial filling may reduce the risk of rupture of the container if it is subjected to shock and reduce the risk of leakage if the container is subjected to high temperatures.

25

The films are then sealed together, for example by heat sealing across the flange. A suitable heat sealing temperature is, for example, 120°C to 195°C, for example 140°C to 150°C. A suitable sealing pressure is, for example, from 250 kPa to 800 kPa. Examples of sealing pressures are 276 kPa to 552 kPa (40 p.s.i. to 80 p.s.i.), especially 345 kPa to 483 kPa (50 p.s.i. to 70 p.s.i.) or 400 kPa to 800 kPa (4 to 8 bar), especially 500 kPa to 700 kPa (5 to 7 bar) depending on the heat sealing machine used. Suitable sealing dwell times are at least 0.4 seconds, for example 0.4 to 2.5 seconds. Other methods of sealing the films together may be used, for example infra-red radio frequency ultrasonic or

35

plate, insert bonding, fraction sealing or spin welding. An adhesive such as water or an aqueous solution of PVOH may also be used. The adhesive can be applied to the films by spraying, transfer coating, roller coating or otherwise coating, or the films can be passed through a mist of the adhesive. The seal desirably is also water-soluble.

It is, however, extremely difficult to manufacture products using PVOH and other materials having similar physical characteristics, partly because of their hygroscopic nature, but mainly due to the fact that the material is very soft and floppy, making it extremely difficult to handle and cut. In most thermoforming, vacuum forming or other similar forming processes, the films used have a degree of strength and rigidity. Thus friction drives are generally, although not exclusively, used to support the films and to transport them through the machine during the process. PVOH and similar films do not have this strength or rigidity and would stretch, thin and tear if subjected to such handling.

Furthermore, thermo- and other such forming processes impose a significant amount of drawing and stretching of the material. As such the known method of thermoforming using PVOH materials utilises a single mould for each moulded product, with each PVOH film placed manually over each mould. This means that the amount of material available for deforming is greater, but it is a very labour intensive, slow and therefore costly process to achieve the manufacture of this type of product.

We have discovered that standard horizontal intermittent motion thermoforming machines, such as those supplied by Multivac, Doyen and Tiromat, can be used to produce thermoformed containers from PVOH and films of a similar nature at normal production speeds. However

- 6 -

particular to the drive system, in order to run such films at normal production speeds.

5 It is therefore an object of the present invention to provide an improvement in the process for manufacturing such containers, to enable a plurality of water-soluble containers to be formed simultaneously. A further objective is to provide a tool for use in a process for producing a plurality of water-soluble  
10 containers made from PVOH or other films of a similar physical nature or the like, at each stroke of an horizontal intermittent motion thermoforming machine. Yet another objective is to provide an improved process for producing multiple containers on a production scale.

15

The invention therefore provides a process for producing a water-soluble container using a horizontal intermittent motion thermoforming machine which comprises the steps of:

20

a) locating a first water-soluble film over a mould, said mould containing a plurality of pocket forming cavities, defined by side walls and a base, in a 2-dimensional array, each cavity being surrounded by a  
25 planar surface of the mould on all sides in which the shortest dimension of the planar surface between two adjacent cavities is at least 3mm and between an edge of the mould and the closest cavity is at least 1.5mm;

30

b) thermoforming the first film to produce a plurality of pockets;

35

c) at least partially filling the pockets with a composition; and

d) sealing the plurality of the at least partially filled pockets, wherein in which the cavities are

plurality of continuous strips of uninterrupted planar surface of the mould from a leading to a trailing edge of the mould, for receiving support means fitted to the machine for supporting the film.

5

The invention further provides a mould for use in a thermoforming process for manufacturing water-soluble containers from water-soluble films, in which said mould contains a plurality of pocket forming cavities, defined by side walls and a base, in a 2-dimensional array, each cavity being surrounded by a planar surface of the mould on all sides in which the shortest dimension of the planar surface between two adjacent cavities is at least 3mm and between an edge of the mould and the closest cavity is at least 1.5mm, and in which the cavities are positioned in the array such that there are a plurality of continuous strips of uninterrupted planar surface of the mould from a leading to a trailing edge of the mould.

20

The invention will now be described, in further detail, by way of example only, with reference to and as shown in the accompanying drawings in which:-

Figure 1 is an end elevation of a mould used in the present invention;

25

Figure 2 is a side sectional elevation of the mould of Figure 1 on the line I-I;

30

Figures 3 to 5 are respectively plan views and cross sectional side elevations of a section of the mould of figure 1 showing the dimensions of the cavities;

35

Figure 6 is a plan view of the mould of Figure 1;  
and

Figure 7 is a schematic representation illustrating



- 8 -

Figure 8 shows support rails supporting a web of material on a horizontal intermittent thermoforming machine.

5

Figures 1 and 2 show a mould 10 used for thermoforming a plurality of containers from PVOH or films having similar physical characteristics on a horizontal intermittent thermoforming machine comprising a series of stations as shown in Figure 7. These are the forming area 30, at which the film 31 is supplied from a reel to the moulds 10 and where the first thermoforming step takes place to form pockets; the filling station 32, at which the pockets are filled; the sealing station 33, to which a further film 34 is supplied to seal the pockets; the cooling station 35; and the cutting station 36 where the sealed containers are separated from each other by shear knives 38.

Each mould 10 comprises a 2-dimensional array of pocket forming cavities 11. Although the Figures illustrate a regular array of 6 x 7 cavities 11 to form 42 containers simultaneously, the number and relative positioning of the cavities 11 may be varied. Essentially the surface dimensions of the mould are determined by the width and draw of the machine on which it is to be used. The best arrangement of the individual cavities 11 is determined according to the following considerations.

Each cavity 11 must be surrounded by a planar surface 18 on all sides, to allow for subsequent sealing of the second film to the first films. This dimension should be at least 1.5mm, but is preferably in the range of 2mm to 5mm. Thus the distance between any cavity and the edge of the mould 10 is at least 1.5mm and the distance between any two cavities 11 is at least 3mm. The maximum distance is obviously determined by the size of the mould 10 but in practice for commercial reasons

- 9 -

As the materials used are very flexible, the web of film tends to sag. In order to enable all of the cavities 11 to be filled, support means must be fitted to the machine, from the end of the thermoforming station to the start of the filling station, and also preferably to the cutting station 36, to support the web of film. The support means may be provided by rails, bars, filaments, wires, rope, cable or the like. Most preferred are wires or rails. Where rails 1 are used, as shown in Figure 7, the leading ends of the rails may have a smooth cam surface 2 for lifting the web. The support means can be intermittent or, more preferably, continuous.

Figure 8 shows how the web is drawn down from the thermoforming station by being held by grippers 3 which are pulled apart to provide some tension in the web. Too much tension will displace the thermoformed pockets. However, not enough tension is provided so that the web remains flat for filling. The support rails 1 maintain the web as a substantially flat surface. This places an extra constraint on the arrangement of the cavities within the space available i.e. there must be clear channels 21 (see arrows Z on Figure 6) through the pattern of cavities 11 from the leading edge of the mould 10 to the trailing edge. It is preferred that these channels 21 are available between each cavity 11 (across the web i.e. on the leading edge), but this is not essential, depending on the number of cavities 11 across the leading edge. At least every other cavity should be supported.

Located in the mould 10 beneath the cavities 11 are air channels 15, which communicate with the cavities 11 via air bores 16. The number and positioning of the air bores 15 has an effect on how the film is drawn into the cavities 11 during the thermoforming process, and therefore consideration must be given to an appropriate

- 10 -

configuration of the cavities 11 used. In particular they must be designed and arranged to effect the most even deformation of the film into the cavities 11. In a preferred embodiment the air bores 15 are located in the regions where the end and side walls 12, 13 of the cavities 11 join the cavity base 14. The holes are preferably of 0.1mm to 1mm diameter and more preferably 0.4mm to 0.5mm. Vacuum release bores 17 are drilled in the cavity bases 14.

The shape of the cavities 11 is dictated partly by the intended use of the containers, but also by the processing constraints. A particularly convenient shape for an automatic dishwasher composition is illustrated in Figure 3 to 5. The dimensions of the cavities are determined by the required fill volume of the containers and any constraints resulting from the intended use of the containers. For example, if the containers are to be used as refill sachets for a trigger spray, the width of the containers, and therefore the cavities is determined by the diameter of the spray bottle neck. If the containers are to be used for a dishwasher product, all three dimensions are determined by the dispenser into which the containers will eventually be placed.

One particularly suitable embodiment which we have found for a dishwasher product has a rectangular cavity mouth, the dimensions of which are 29mm x 39mm, with rounded corners, having a radius  $R_1$  of, preferably, 10mm.

The depth of the cavities depends partly on the area of the cavity mouth, to ensure that the film, can be drawn down without over thinning and tearing. This can also be affected by the area of film available between adjacent cavities 11. Referring to Figure 6, the upper surface 18 of the mould 10 can clearly be seen. The gaps between the cavities 11 are marked as dimensions  $X$  and  $Y$  in this particular layout. The ratio  $X:Y$  is

- 11 -

preferably about 1:1. X and Y are desirably from 5 to 13mm, preferably 7 to 12mm, preferably about 10mm. The preferred depth is in the range of 10 to 80 % of the shortest dimension of the cavity mouth, and more  
5 preferably in the range of 40 to 60 %. A preferred depth of the cavities 11 where the mouth of the cavities 11 is 29mm by 39mm is 16mm.

The corners 19 formed where the end and side walls  
10 12,13 of the cavities 11 join the cavity base 14, are preferably radiussed to avoid over thinning or tearing of the film, as it is drawn down the side walls 13 and the corners 19. The corners 19 preferably have a radius  $R_2$  and  $R_3$  of between 8mm and 10mm.

15 The cavity base 14 may be planar or rounded. Especially where a greater cavity depth is used, such as 18mm or 19mm, it may be preferable to have a rounded base 14 to prevent regions of thicker material from being  
20 drawn directly downward to the centre of the base 14. A suitable radius for the base 14, in particular where the cavity depth is 18mm, is 20mm. The use of a rounded base 14 means that the positioning and direction of the air bores 16 may be different from those used with flat-  
25 bottomed cavities 11. This changes the way in which the film is drawn into the cavities 11.

The edges 20, where the cavity end and side walls  
30 12,13 join the upper surface 18 of the mould 10, are preferably rounded to allow for a smooth movement of the film over the edges 20 during the thermoforming process, to minimise the risk of the film snagging or tearing. The radius  $R_4$  is preferably small, e.g. 1mm, as it is difficult to fill this area of the cavities 11 without  
35 risk of fouling the sealing area.

Another dimension which must be carefully controlled to enable the film to be drawn into the cavities 11

- 12 -

For cavities of the dimensions given above, it is preferred that the spacing between the cavities lies in the range of 9mm to 16mm.

5           The draft angle of the side walls 12, 13 is preferably 3° to 5° to assist in the release of the containers. However, for certain very soft materials, such as PVOH, draft angles may not be necessary.

10           The sizing of the mould 10, incorporating an array of cavities 11 in this manner, enables the film to be supported. The width of the web of film is determined by the width of the machine in which the mould is fitted. The mould is designed to fit the width of the machine  
15 with a suitable "overhang" of film, which can be used for transporting the film. It is suggested that small clips or grippers attached to a plurality of driven chains would enable the films to be transported appropriately. The grippers preferably toe-out to provide tension as the  
20 web of film moves through the machine.

          A first PVOH film is thus positioned over the mould 10 and thermoformed in a known manner to form a plurality of pockets. The pockets are then filled with an  
25 aqueous or other composition and a second film brought into position over the plurality of pockets. The second film may be the same as the first film or another material and is heat, or otherwise sealed, to the parts of the first film remaining on the upper surface 18 of  
30 the mould, as described previously.

          The filled containers may then be separated from each other. Alternatively, they may be left conjoined and, for example, perforations provided between the  
35 individual containers so that they can be separated easily at a later stage, for example by a consumer. If the containers are separated, the flanges may be left in place. However, desirably the flanges are reduced in

- 13 -

dimensional appearance. Generally the flanges remaining should be as small as possible for aesthetic purposes while bearing in mind that some flange is required to ensure the two films remain adhered to each other. A  
5 flange having a width of 1mm to 10mm is desirable, preferably 1.5mm to 6mm, most preferably about 5mm.

For containers of compositions having a high water content, the containers may then be left for a while to  
10 attain their attractive appearance, or may be immediately packaged into boxes for retail sale, and left to attain their attractive appearance in the boxes. The containers may themselves be packaged in outer containers if desired, for example non-water soluble containers which  
15 are removed before the water-soluble containers are used.

If more than one film is used for the containers, the films may be identical or different. The film may be partially or fully alcoholised or hydrolysed, for  
20 example, it may be from 40 to 100%, preferably 70 to 92%, more preferably about 88% or about 92%, alcoholised or hydrolysed, polyvinyl acetate film. The degree of hydrolysis is known to influence the temperature at which the PVOH starts to dissolve in water. 88% hydrolysis  
25 corresponds to a film soluble in cold (i.e. room temperature) water, whereas 92% hydrolysis corresponds to a film soluble in warm water. An example of a preferred PVOH is ethoxylated PVOH. The film may be cast, blown or extruded. It may also be unorientated, mono-axially  
30 oriented or bi-axially oriented.

It is possible for suitable additives such as plasticisers, lubricants and colouring agents to be added to the film. Components which modify the properties of  
35 the polymer may also be added. Plasticisers are generally used in an amount of up to 20 wt%, for example, from 15 to 20 wt%. Lubricants are generally used in an amount of 0.5 to 5 wt%. The polymer is therefore

- 14 -

on the total number of the composition used to form the film. Suitable plasticisers are, for example, pentaerythritols such as depentaerythritol, sorbitol, mannitol, glycerine and glycols such as glycerol, ethylene glycol and polyethylene glycol. Solids such as talc, stearic acid, magnesium stearate, silicon dioxide, zinc stearate or colloidal silica may also be used.

It is also possible to include one or more particulate solids in the films in order to accelerate the rate of dissolution of the container. This solid may also be present in the contents of the container. Dissolution of the solid in water is sufficient to cause an acceleration in the break-up of the container, particularly if a gas is generated, when the physical agitation caused may, for example, result in the virtually immediate release of the contents from the container. Examples of such solids are alkali or alkaline earth metal, such as sodium, potassium, magnesium or calcium, bicarbonate or carbonate, in conjunction with an acid. Suitable acids are, for example, acidic substances having carboxylic or sulfonic acid groups or salts thereof. Examples are cinnamic, tartaric, mandelic, fumaric, maleic, malic, palmoic, citric and naphthalene disulfonic acids.

The film is generally cold water (20°C) soluble, but, depending on its degree of hydrolysis, may be insoluble in cold water at 20°C and only become soluble in warm water or hot water having a temperature of, for example, 30°C, 40°C, 50°C or even 60°C. If the film is soluble in cold water, or water at a temperature of up to say 35°C, steps must be taken to ensure that an aqueous composition contained inside the container does not dissolve the film from the inside. Steps may be taken to treat the inside surface of the film, for example by coating it with a semi-permeable or partial water barrier such as polyethylene or polypropylene or a hydrogel such

- 15 -

or dissolve or disperse into microscopic particles when the container is dissolved in water. Steps may also be taken to adapt the composition to ensure that it does not dissolve the film. For example, it has been found that ensuring the composition has a high ionic strength or contains an agent which minimises water loss through the walls of the container will prevent the composition from dissolving the PVOH film from the inside. This is described in more detail in EP-A-518,689 and WO 97/27743.

It is particularly important to avoid pinholes in the film through which leakage of the contained composition may occur. It may therefore be appropriate to use a laminate of two or more layers of a different or the same film, as pinholes are unlikely to coincide in two layers of material.

When first and second films are used to form the containers of the present invention, the first film will generally have a thickness before thermoforming of 20 to 500  $\mu\text{m}$ , especially 70 to 400  $\mu\text{m}$ , for example 70 to 300  $\mu\text{m}$  or 90 or 110 to 150  $\mu\text{m}$ . The thickness of the second PVOH film may be less than that of the first film as the second film will not generally be thermoformed so localised thinning of the sheet will not occur. The thickness of the second film will generally be from 20 to 150  $\mu\text{m}$  or 160  $\mu\text{m}$ , preferably from 40 or 50 to 90 or 100  $\mu\text{m}$ , more preferably from 50 to 80  $\mu\text{m}$ .

The films may be chosen, if desired, such that they have the same thickness before the first film is thermoformed, or have the same thickness after the first sheet has been thermoformed in order to provide a composition which is encapsulated by a substantially constant thickness of film.

The containers of the present invention generally contain from 5 to 100 g of aqueous composition



- 16 -

use. For example, a dishwashing composition may weigh from 15g to 20g, a water-softening composition may weigh from 25 to 35g, and a laundry composition may weigh from 10 to 40g, especially 20 to 30g or 30 to 40g.

5

The containers may have any shape achievable by thermoforming. For example they can take the form of a cylinder, cube or cuboid, i.e. a rectangular parallelepiped whose faces are not all equal. In general, because the containers are not rigid, the sides are not planar, but rather are convex. If the container is formed from a thermoformed film and a planar film, the seam between the two films will appear nearer one face of the container rather than the other. Apart from the deformation of the container due to the shrinkage of the film discussed above, deformation may also occur at the stage of manufacture if desired. For example, if the pocket is filled with a gelled composition having a height greater than that of the pocket, the second film will be deformed when placed on top of the pocket. A shaped sealing platen is required to achieve this effect.

In general the maximum dimension of the filled part of the container (excluding any flanges) is 5cm. For example, a rounded cuboid container may have a length of 1 to 5cm, especially 3.5 to 4.5cm, a width of 1.5 to 3.5cm, especially 2 to 3cm, and a height of 1 to 2.5cm, especially 1 to 2cm, and more especially 1.25 to 1.75cm.

The container desirably contains an aqueous composition which is a fabric care, surface care or dishwashing composition. Thus, for example, it may be a dishwashing, water-softening, laundry or detergent composition or a rinse aid. In this case the container is preferably suitable for use in a domestic washing machine such as a laundry washing machine or a dishwashing machine. The composition may also be a disinfectant antibacterial or antiseptic composition

- 17 -

concentrated refill composition, for example a trigger-type spray as used in domestic situations. Such a composition can simply be added to water already held in the spray container. Examples of surface care  
5 compositions are those used to clean, treat or polish a surface. Suitable surfaces are, for example, household surfaces such as worktops, as well as surfaces of sanitary ware, such as sinks, basins and lavatories.


10 The composition preferably contains greater than 3 wt% free water based on the weight of the aqueous composition, in order to ensure that the container has an attractive appearance. The actual amount of water present in the composition may be in excess of the amount  
15 of free water, since the total water content includes water of solvation and water held within a gelled matrix. Free water can be determined by a standard loss-on-drying determination test carried out at 60° C for 3 hours at 200 mbar (20kPa). Desirably the composition contains more  
20 than 10 wt%, 15 wt%, 20 wt%, 25 wt% or 30 wt% total water, but desirably less than 80 wt% total water, more desirably less than 70 wt%, 60 wt%, 50 wt% or 40 wt% total water. It may, for example, contain from 30 to 65 wt% total water.

25 The remaining ingredients of the composition depend on the use of the composition. Thus, for example, the compositions may contain surface active agents such as an anionic, nonionic, cationic, amphoteric or zwitterionic  
30 surface active agents or mixtures thereof.

Examples of anionic surfactants are straight-chained or branched alkyl sulfates and alkyl polyalkoxylated sulfates, also known as alkyl ether sulfates. Such  
35 surfactants may be produced by the sulfation of higher C<sub>8</sub>-C<sub>20</sub> fatty alcohols.

Examples of primary alkyl sulfate surfactants are

- 18 -



wherein R is a linear C<sub>8</sub>-C<sub>20</sub> hydrocarbyl group and M is a  
 5 water-solubilising cation. Preferably R is C<sub>10</sub>-C<sub>16</sub> alkyl,  
 for example C<sub>12</sub>-C<sub>14</sub>, and M is alkali metal such as  
 lithium, sodium or potassium.

Examples of secondary alkyl sulfate surfactants are  
 10 those which have the sulfate moiety on a "backbone" of  
 the molecule, for example those of formula:



15 wherein m and n are independently 2 or more, the sum of  
 m+n typically being 6 to 20, for example 9 to 15, and M  
 is a water-solubilising cation such as lithium, sodium or  
 potassium.

20 Especially preferred secondary alkyl sulfates are  
 the (2,3) alkyl sulfate surfactants of formulae:



for the 2-sulfate and 3-sulfate, respectively. In these  
 formulae x is at least 4, for example 6 to 20, preferably  
 10 to 16. M is a cation, such as an alkali metal, for  
 30 example lithium, sodium or potassium.

Examples of alkoxyated alkyl sulfates are ethoxylated  
 alkyl sulfates of the formula:



wherein R is a C<sub>8</sub>-C<sub>20</sub> alkyl group, preferably C<sub>10</sub>-C<sub>18</sub> such  
 as a C<sub>12</sub>-C<sub>14</sub>, n is at least 1, for example from 1 to 20


- 19 -

forming cation such as lithium, sodium, potassium, ammonium, alkylammonium or alkanolammonium. These compounds can provide especially desirable fabric cleaning performance benefits when used in combination with alkyl sulfates.

The alkyl sulfates and alkyl ether sulfates will generally be used in the form of mixtures comprising varying alkyl chain lengths and, if present, varying degrees of alkoxylation.

Other anionic surfactants which may be employed are salts of fatty acids, for example C<sub>8</sub>-C<sub>18</sub> fatty acids, especially the sodium, potassium or alkanolamine salts, and alkyl, for example C<sub>8</sub>-C<sub>18</sub>, benzene sulfonates.

Examples of nonionic surfactants are fatty acid alkoxyates, such as fatty acid ethoxyates, especially those of formula:



wherein R is a straight or branched C<sub>8</sub>-C<sub>16</sub> alkyl group, preferably a C<sub>9</sub>-C<sub>15</sub>, for example C<sub>10</sub>-C<sub>14</sub> or C<sub>12</sub>-C<sub>14</sub>, alkyl group and n is at least 1, for example from 1 to 16, preferably 2 to 12, more preferably 3 to 10.

The alkoxyated fatty alcohol nonionic surfactant will frequently have a hydrophilic-lipophilic balance (HLB) which ranges from 3 to 17, more preferably from 6 to 15, most preferably from 10 to 15.

Examples of fatty alcohol ethoxyates are those made from alcohols of 12 to 15 carbon atoms and which contain about 7 moles of ethylene oxide. Such materials are commercially marketed under the trademarks Neodol 25-7 and Neodol 23-6.5 by Shell Chemical Company. Other useful Neodols include Neodol 1-5 an ethoxyated fatty

- 20 -

about 5 moles of ethylene oxide; Neodol 23-9, an ethoxylated primary C<sub>12</sub>-C<sub>13</sub> alcohol having about 9 moles of ethylene oxide; and Neodol 91-10, an ethoxylated C<sub>9</sub>-C<sub>11</sub> primary alcohol having about 10 moles of ethylene oxide.

5

Alcohol ethoxylates of this type have also been marketed by Shell Chemical Company under the Dobanol trademark. Dobanol 91-5 is an ethoxylated C<sub>9</sub>-C<sub>11</sub> fatty alcohol with an average of 5 moles ethylene oxide and Dobanol 25-7 is an ethoxylated C<sub>12</sub>-C<sub>15</sub> fatty alcohol with an average of 7 moles of ethylene oxide per mole of fatty alcohol.

Other examples of suitable ethoxylated alcohol nonionic surfactants include Tergitol 15-S-7 and Tergitol 15-S-9, both of which are linear secondary alcohol ethoxylates available from Union Carbide Corporation. Tergitol 15-S-7 is a mixed ethoxylated product of a C<sub>11</sub>-C<sub>15</sub> linear secondary alkanol with 7 moles of ethylene oxide and Tergitol 15-S-9 is the same but with 9 moles of ethylene oxide.

Other suitable alcohol ethoxylated nonionic surfactants are Neodol 45-11, which is a similar ethylene oxide condensation products of a fatty alcohol having 14-15 carbon atoms and the number of ethylene oxide groups per mole being about 11. Such products are also available from Shell Chemical Company.

Further nonionic surfactants are, for example, C<sub>10</sub>-C<sub>18</sub> alkyl polyglycosides, such as C<sub>12</sub>-C<sub>16</sub> alkyl polyglycosides, especially the polyglucosides. These are especially useful when high foaming compositions are desired. Further surfactants are polyhydroxy fatty acid amides, such as C<sub>10</sub>-C<sub>18</sub> N-(3-methoxypropyl) glycamides and ethylene oxide-propylene oxide block polymers of the Pluronic type.

- 21 -

Examples of cationic surfactants are those of the quaternary ammonium type. Examples of amphoteric surfactants are C<sub>10</sub>-C<sub>18</sub> amine oxides and the C<sub>12</sub>-C<sub>18</sub> betaines and sulfobetaines.

5

The total content of surfactants in the composition is desirably 0.1 to 95 wt%, especially 60 or 75 to 90 wt%.

10

The total content of surfactants in the laundry or detergent composition is desirably 60 to 95 wt%, especially 75 to 90 wt%. Desirably, especially in a laundry composition, an anionic surfactant is present in an amount of 50 to 75 wt%, a nonionic surfactant is present in an amount of 5 to 20 wt%, and/or a cationic surfactant is present in an amount of from 0 to 10 wt% and/or an amphoteric surfactant may be present in an amount of from 0 to 10 wt%. Desirably, in a dishwashing composition, the anionic surfactant is present in an amount of from 0.1 to 50 wt%, a non-ionic surfactant is present in an amount of 0.5 to 20 wt% and/or a cationic surfactant is present in an amount of from 1 to 15 wt%. These amounts are based

15

20

25

On the solids content of the composition, i.e. excluding any water or solvent which may be present.

30

35

The compositions, particularly when used as laundry washing or dishwashing compositions, may also comprise enzymes, such as protease, lipase, amylase, cellulase and peroxidase enzymes. Such enzymes are commercially available and sold, for example, under the registered trade marks Esperase, Alcalase, Savinase, Termamyl, Lipolase and Celluzyme by Nova Industries A/S and Maxatasc by International Biosynthetics, Inc. Desirably the enzymes are present in the composition in an amount of from 0.5 to 3 wt%, especially 1 to 2 wt%.

- 22 -

Dishwasher compositions usually comprise a detergency builder. Suitable builders are alkali metal or ammonium phosphates, polyphosphates, phosphonates, polyphosphonates, carbonates, bicarbonates borates, polyhydroxysulfonates, polyacetates, carboxylates and polycarboxylates such as citrates. The builder is desirably present in an amount of up to 90wt%, preferably 15 to 90wt%, more preferably 15 to 75wt%, relative to the total content of the composition.

10

Further details of suitable components are given in, for example, EP-A-694,059, EP-A-518720 and WO 99/06522.

The compositions may, if desired, comprise a thickening agent or gelling agent. Suitable thickeners are polyacrylate polymers such as those sold under the trade mark CARBOPOL, or the trade mark ACUSOL by Rohm and Haas Company. Other suitable thickeners are xanthan gums. The thickener, if present, is generally present in an amount of from 0.2 to 4 wt%, especially 0.5 to 2 wt%.

The compositions can also optionally comprise one or more additional ingredients. These include conventional detergent composition components such as further surfactants, bleaches, bleach enhancing agents, builders, suds boosters or suds suppressors, anti-tarnish and anti-corrosion agents, organic solvents, co-solvents, phase stabilisers, emulsifying agents, preservatives, soil suspending agents, soil release agents, germicides, phosphates such as sodium tripolyphosphate or potassium tripolyphosphate, pH adjusting agents or buffers, non-builder alkalinity sources, chelating agents, clays such as smectite clays, enzyme stabilizers, anti-limescale agents, colourants, dyes, hydrotropes, dye transfer inhibiting agents, brighteners and perfumes. If used, such optional ingredients will generally constitute no more than 10 wt%, for example from 1 to 6 wt%, of the total weight of the compositions

- 23 -

The builders counteract the effects of calcium, or other ion, water hardness encountered during laundering or bleaching use of the compositions herein. Examples of such materials are citrate, succinate, malonate, 5 carboxymethyl succinate, carboxylate, polycarboxylate and polyacetyl carboxylate salts, for example with alkali metal or alkaline earth metal cations, or the corresponding free acids. Specific examples are sodium, potassium and lithium salts of oxydisuccinic acid, 10 mellitic acid, benzene polycarboxylic acids, C<sub>10</sub>-C<sub>22</sub> fatty acids and citric acid. Other examples are organic phosphonate type sequestering agents such as those sold by Monsanto under the trade mark Dequest and alkyl hydroxy phosphonates. Citrate salts and C<sub>12</sub>-C<sub>18</sub> fatty 15 acid soaps are preferred.

Other suitable builders are polymers and copolymers known to have builder properties. For example, such materials include appropriate polyacrylic acid, 20 polymaleic acid, and polyacrylic/polymaleic and copolymers and their salts, such as those sold by BASF under the trade mark Sokalan.

The builders generally constitute from 0 to 3 wt%, 25 more preferably from 0.1 to 1 wt%, by weight of the compositions.

Compositions which comprise an enzyme may optionally contain materials which maintain the stability of the 30 enzyme. Such enzyme stabilizers include, for example, polyols such as propylene glycol, boric acid and borax. Combinations of these enzyme stabilizers may also be employed. If utilized, the enzyme stabilizers generally constitute from 0.1 to 1 wt% of the compositions.

35

The compositions may optionally comprise materials which serve as phase stabilizers and/or co-solvents. Example are C<sub>1</sub>-C<sub>4</sub> alcohols or diols such as methanol.



- 24 -

alkanolamines such as mono-, di- and triethanolamines and  
monoisopropanolamine can also be used, by themselves or  
in combination with the alcohols. The phase stabilizers  
and/or co-solvents can, for example, constitute 0 to 1  
5 wt%, preferably 0.1 to 0.5 wt%, of the composition.

The compositions may optionally comprise components  
which adjust or maintain the pH of the compositions at  
optimum levels. Examples of pH adjusting agents are NaOH  
10 and citric acid. The pH may be from, for example, 1 to  
13, such as 8 to 11 depending on the nature of the  
composition. For example, a dishwashing composition  
desirably has a pH of 8 to 11, a laundry composition has  
a pH of 7 to 9, and a water-softening composition has a  
15 pH of 7 to 9.

20

25

30

35

- 25 -

CLAIMS

1. A process for producing a water-soluble container using a horizontal intermittent motion thermoforming machine which comprises the steps of:
- 5
- a) locating a first water-soluble film over a mould, said mould containing a plurality of pocket forming cavities, defined by side walls and a base, in a 2-dimensional array, each cavity being surrounded by a planar surface of the mould on all sides in which the shortest dimension of the planar surface between two adjacent cavities is at least 3mm and between an edge of the mould and the closest cavity is at least 1.5mm;
- 10
- b) thermoforming the first film to produce a plurality of pockets;
- c) at least partially filling the pockets with a composition; and
- 20
- d) sealing the plurality of the at least partially filled pockets,
- 25
- wherein the cavities are positioned in the array such that there are a plurality of continuous strips of uninterrupted planar surface of the mould from a leading to a trailing edge of the mould, for receiving support means fitted to the machine for supporting the film.
- 30
2. A process as claimed in claim 1 in which step d) comprises placing a second water-soluble film on top of the at least partially filled pockets and sealing the films together.
- 35
3. A process as claimed in any one of the preceding claims in which the water-soluble film is a poly (vinyl

- 26 -

4. A process as claimed in any one of the preceding claims in which the depth of the cavities lies in the range of 10 to 80% of the shortest dimension of the mouth cavity.
- 5
5. A process as claimed in any one of the preceding claims in which the depth of the cavities lies in the range of 40 to 60% of the shortest dimension of the mouth cavity.
- 10
6. A process as claimed in any one of the preceding claims in which the cavity bases are planar.
- 15
7. A process as claimed in any one of claims 1 to 4 in which the cavity bases are rounded.
8. A process as claimed in claim 6 in which the rounded bases have a radius of 20mm.
- 20
9. A process as claimed in any one of the preceding claims in which corners formed where the cavity side walls meet each other are rounded.
- 25
10. A process as claimed in claim 9 in which the side wall corners have a radius of 10mm.
11. A process as claimed in any one of the preceding claims in which edges formed where the cavity side walls meet an upper surface of the mould are rounded.
- 30
12. A process as claimed in claim 11 in which the side wall-mould upper surface edges have a radius of 1mm.
13. A process as claimed in any one of the preceding claims in which bottom corners, formed where the cavity side walls meet the cavity base, are rounded.
- 35

- 27 -

side wall-base bottom corners have a radius of 10mm.

15. A process as claimed in claim 13 or claim 14 in  
which air bores are located in the side wall base bottom  
5 corners.

16. A process as claimed in claim 15 in which the air  
bores have a diameter of 0.1mm to 1mm.

10 17. A process as claimed in claim 16 in which the air  
bores have a diameter of 0.4mm to 0.5mm.

18. A process as claimed in any one of the preceding  
claims in which the shortest dimension of the planar  
15 surface between two adjacent cavities lies in the range  
of 4mm to 10mm and between an edge of the mould and the  
closest cavity lies in the range of 2mm to 5mm.

19. A process as claimed in any one of the preceding  
20 claims in which a continuous strip of uninterrupted  
planar surface is provided between adjacent rows of  
cavities.

20. A process as claimed in any one of the preceding  
25 claims in which a continuous strip of uninterrupted  
planar surface is provided between every other pair of  
adjacent rows of cavities.

21. A mould for use in a thermoforming process for  
30 manufacturing water-soluble containers from water-soluble  
films, in which said mould contains a plurality of pocket  
forming cavities, defined by side walls and a base, in a  
2-dimensional array, each cavity being surrounded by a  
planar surface of the mould on all sides in which the  
35 shortest dimension of the planar surface between two  
adjacent cavities is at least 3mm and between an edge of  
the mould and the closest cavity is at least 1.5mm, and  
in which the cavities are positioned in the array such

uninterrupted planar surface of the mould from a leading to a trailing edge of the mould.

22. A mould as claimed in claim 21 in which the depth  
5 of the cavities lies in the range of 10 to 80% of the shortest dimension of the cavity mouth.

23. A mould as claimed in claim 21 or 22 in which the  
10 depth of the cavities lies in the range of 40 to 60% of the shortest dimension of the cavity mouth.

24. A mould as claimed in any one of claims 21 to 23 in which the cavity bases are planar.

15 25. A mould as claimed in any one of claims 21 to 24 in which the cavity bases are rounded.

26. A mould as claimed in claim 25 in which the rounded  
20 bases have a radius of 20mm.

27. A mould as claimed in any one of claims 21 to 26 in which corners formed where the cavity side walls meet each other are rounded.

25 28. A mould as claimed in claim 27 in which the side wall corners have a radius of 10mm.

29. A mould as claimed in any one of claims 21 to 28 in which edges formed where the cavity side walls meet an  
30 upper surface of the mould are rounded.

30. A mould as claimed in claim 29 in which the side wall-mould upper surface edges have a radius of 1mm.

35 31. A mould as claimed in any one of claims 21 to 30 in which bottom corners, formed where the cavity side walls meet the cavity base, are rounded.

32. A mould as claimed in claim 31 in which the side

wall-base bottom corners have a radius of 10mm.

33. A mould as claimed in claim 31 or claim 32 in which  
5 air bores are located in the side walls base bottom  
corners.

34. A mould as claimed in claim 33 in which the air  
bores have a diameter of 0.1mm to 1mm.

10

35. A mould as claimed in claim 34 in which the air  
bores have a diameter of 0.4mm to 0.5mm.

15

36. A mould as claimed in any one of claims 21 to 35 in  
which the shortest dimension of the planar surface  
between two adjacent cavities lies in the range of 4mm to  
10mm and between an edge of the mould and the closest  
cavity lies in the range of 2mm to 5mm.

20

37. A mould as claimed in any one of claims 21 to 36 in  
which a continuous strip of uninterrupted planar surface  
is provided between adjacent rows of cavities.

25

38. A mould as claimed in any one of claims 21 to 37 in  
which a continuous strip of uninterrupted planar surface  
is provided between every other pair of adjacent rows of  
cavities.

30

39. A mould as claimed in any one of claims 21 to 38 in  
which air bores are located.

40. A container formed by the process of any one of the  
preceding claims.

35

1/4

Fig.1.


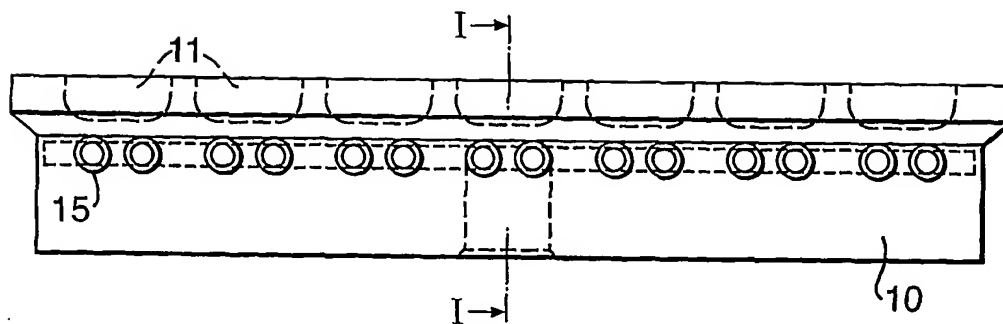


Fig.2.

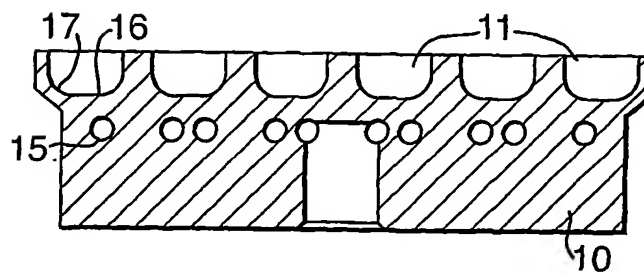

2/4

Fig.3.

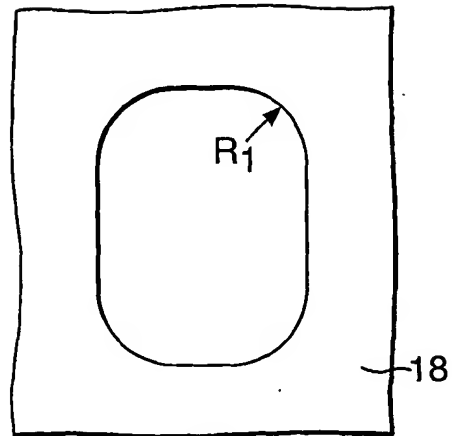


Fig.4.

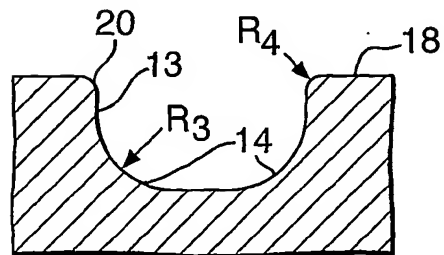


Fig.5.

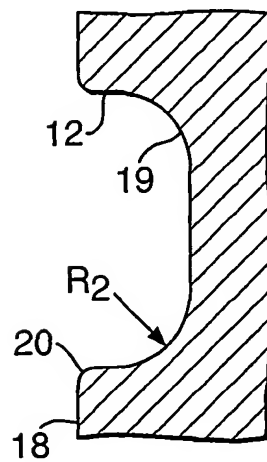




Fig.6.

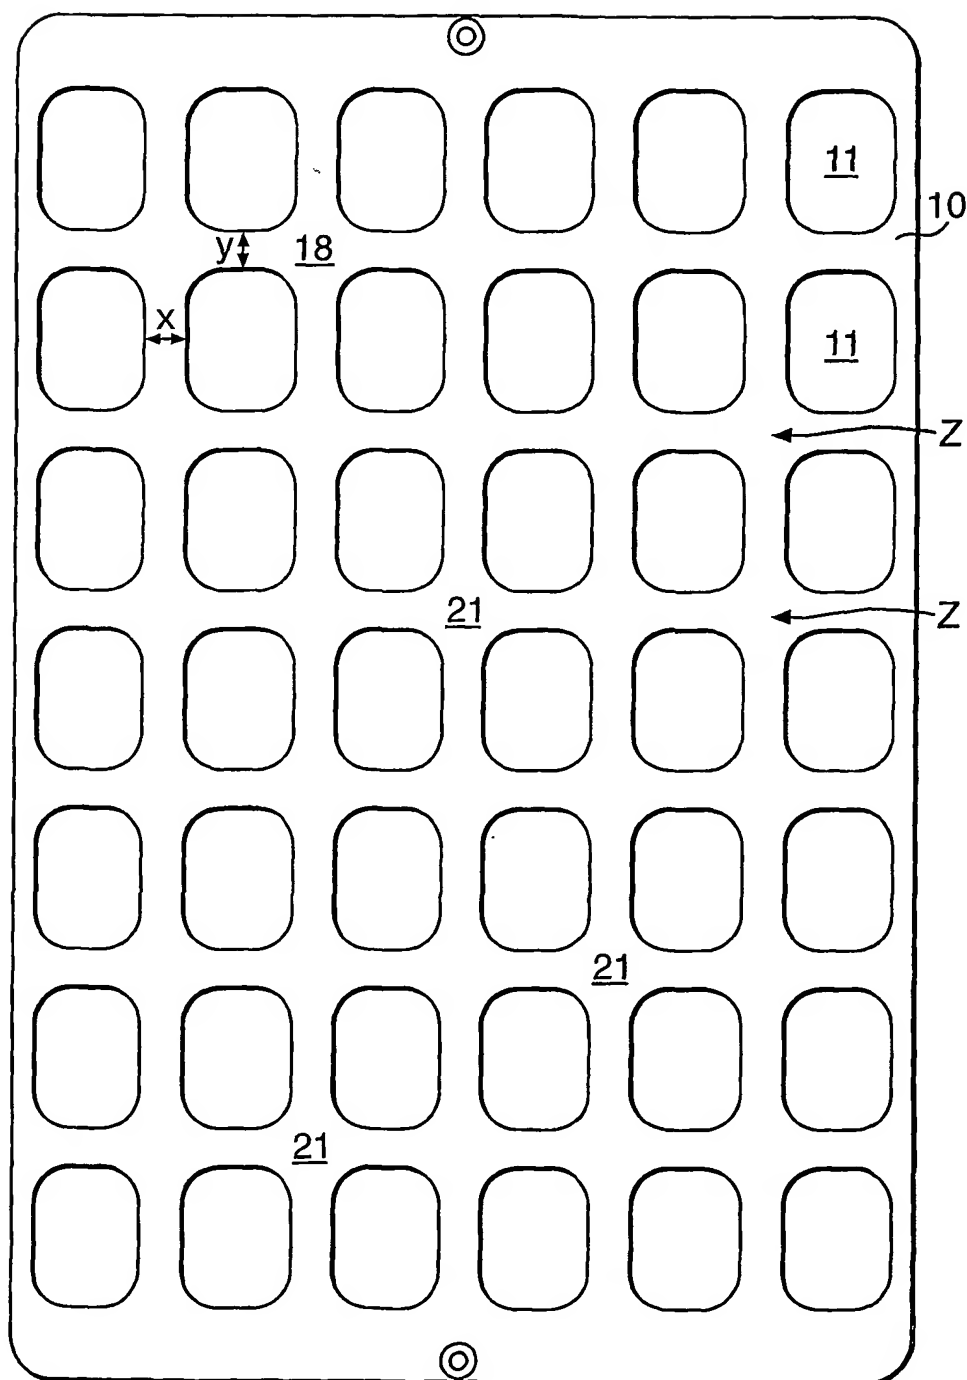


Fig.7.


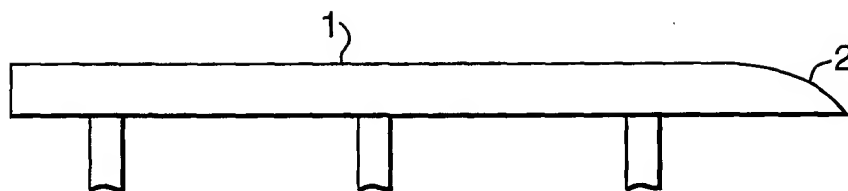


Fig.8.

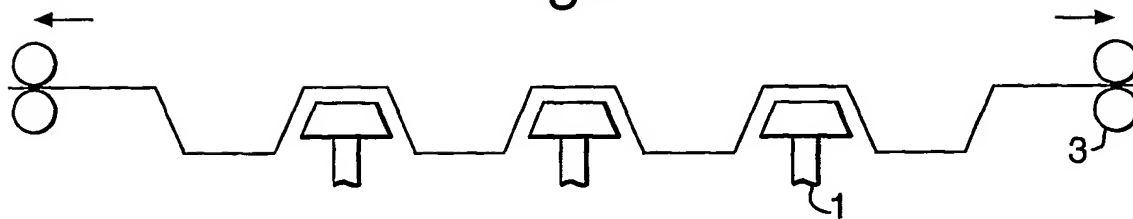

**A. CLASSIFICATION OF SUBJECT MATTER**  
 IPC 7 B65B47/02

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

 Minimum documentation searched (classification system followed by classification symbols)  
 IPC 7 B65B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 92 17382 A (RHONE POULENC AGRICULTURE) 15 October 1992 (1992-10-15) page 4, line 3 -page 4, line 17 page 7, line 2 page 15, line 9 -page 16, line 12 claims 26-30	1-20
Y	US 4 506 495 A (ROMAGNOLI ANDREA) 26 March 1985 (1985-03-26) column 2, line 32 -column 3, line 68	1-20
X	figures 1-5	21-40
P,X	WO 00 55045 A (UNILEVER PLC ;LEVER HINDUSTAN LTD (IN); UNILEVER NV (NL)) 21 September 2000 (2000-09-21) claim 1	21-40
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

## \* Special categories of cited documents :

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*Z\* document member of the same patent family

Date of the actual completion of the international search

27 November 2001

Date of mailing of the international search report

04/12/2001

Name and mailing address of the ISA

 European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

Farizon, P

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 4 987 728 A (VENTURA FRANCIS P) 29 January 1991 (1991-01-29) column 2, line 40 -column 3, line 64 figure 2	1,21,40

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9217382	A	15-10-1992	AP 348 A	28-07-1994
			AT 154564 T	15-07-1997
			AT 154565 T	15-07-1997
			AU 663492 B2	12-10-1995
			AU 1533492 A	02-11-1992
			BR 9205858 A	28-06-1994
			CA 2107341 A1	06-10-1992
			CN 1065436 A ,B	21-10-1992
			CZ 9302063 A3	16-03-1994
			DE 69220483 D1	24-07-1997
			DE 69220483 T2	15-01-1998
			DE 69220501 D1	24-07-1997
			DE 69220501 T2	05-02-1998
			DK 577693 T3	05-01-1998
			DK 608910 T3	29-12-1997
			EP 0577693 A1	12-01-1994
			EP 0608910 A1	03-08-1994
			ES 2104906 T3	16-10-1997
			ES 2106388 T3	01-11-1997
			FI 934354 A	26-11-1993
			WO 9217382 A1	15-10-1992
			GR 3024463 T3	28-11-1997
			GR 3024643 T3	31-12-1997
			HU 65226 A2	02-05-1994
			IE 921094 A1	07-10-1992
			IL 101490 A	15-03-1995
			JP 6506173 T	14-07-1994
			MX 9201538 A1	01-10-1992
			NZ 242248 A	27-01-1995
			PL 171812 B1	30-06-1997
			PT 100349 A	29-04-1994
			RU 2099260 C1	20-12-1997
			SK 107493 A3	08-06-1994
			TR 27730 A	28-06-1995
			ZA 9202467 A	31-03-1993
<hr/>				
US 4506495	A	26-03-1985	IT 1145009 B	05-11-1986
			DE 3202020 A1	19-08-1982
			FR 2498558 A1	30-07-1982
			JP 57142806 A	03-09-1982
<hr/>				
WO 0055045	A	21-09-2000	AU 3161000 A	04-10-2000
			WO 0055045 A1	21-09-2000
<hr/>				
US 4987728	A	29-01-1991	CA 1299087 A1	21-04-1992
			EP 0340360 A1	08-11-1989